


4250...

Thermostat ohne Schalter für konventionelle Stellantriebe

Thermostat sans interrupteur pour servocomandes conventionnelles

Termostato senza interruttore gestire gli azionamenti usuali

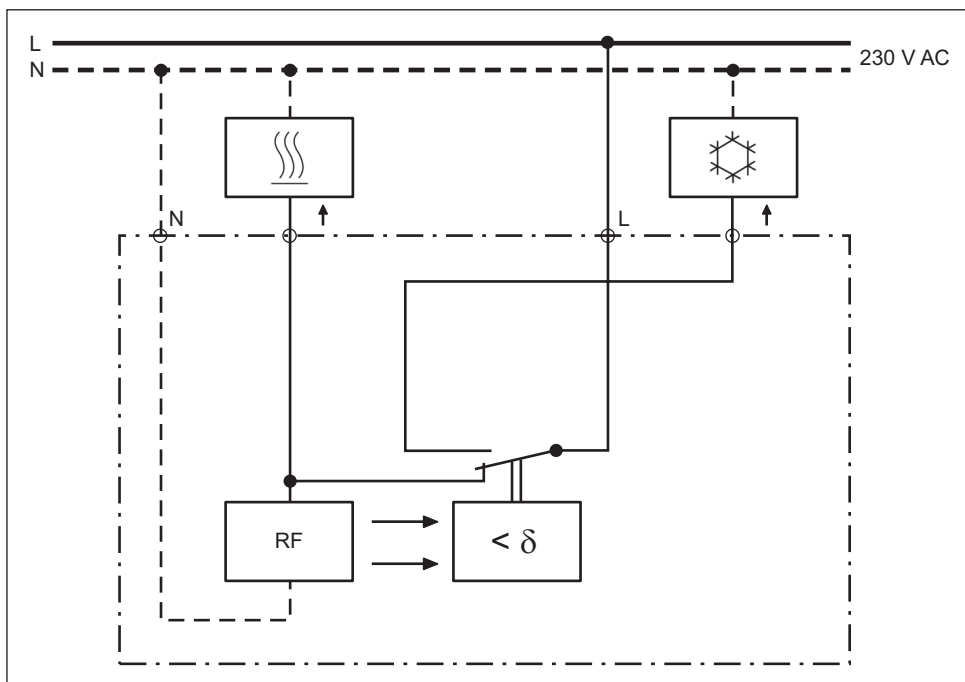

Legende

N = Neutraleiter
 L = Polleiter (230 V AC, 50 Hz)
 ↑ = Lastanschluss
 ☺ = Heizen
 ☹ = Kühlen
 RF = Widerstand für thermische Rückführung
 < δ = Thermobimetall

Légendes

N = neutre
 L = phase (230 V CA, 50 Hz)
 ↑ = connexion de charge
 ☺ = chauffage
 ☹ = refroidissement
 RF = résistance de contre-réaction thermique
 < δ = bilame thermique

Legenda

N = neutro
 L = linea (230 V c.a., 50 Hz)
 ↑ = collegamento di carico
 ☺ = riscaldamento
 ☹ = refrigerazione
 RF = resistenza per ricircolo termico
 < δ = bimetallo termico